
MS Series Screenless Beside-the-Press

The MS Series, the latest innovation from Colortronic, features screenless operation with no longs regrind. The small footprint squeezes into the tightest of spaces. Its rugged, heavy-duty construction packed with innovative standard features assures years of dependable, reliable service.

Standard Features

- Screenless operation produces clean, no longs regrind
- Smallest footprint squeezes into the tightest of spaces
- Quick and easy, no tools access – just open the doors
- Vacuum bin with 1" or 2" diameter take-offs available
- Solid dowel and bolted construction
- Locking swivel casters mounted on base
- TEFC 230/3/60 or 460/3/60 gear motor
- 115/1/60 control voltage wired with electrical/mechanical safety interlock

Optional Features

- Compressed air evacuation system
- High level indicator

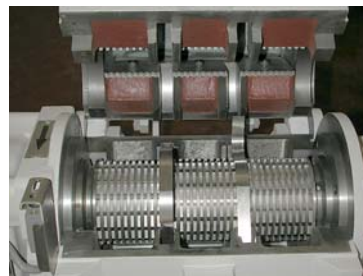


Specifications

Model	MS1010	MS1213	MS1616
Chamber size	10 x 10.5"	11.5 x 13.5"	16" x 16"
Cutter size	5 mm (0.18")		
Feed Height	52"	60"	63"
Throughput	30 lbs./hr	40 lbs./hr.	50 lbs./hr.
Working Envelope (LXW)	29" x 18"	32.5" x 23"	23" x 49"
Weight	396 lbs.	606 lbs.	992 lbs.



Slide out discharge

Clamshell opening
for easy cleaning"Tool free" opening for
quick access during
cleaning

www.colortronicna.com

Corporate Headquarters:
Colortronic North America, Inc.
4100 Market Place
Flint, MI 48507
PH: 810-720-7300
FX: 810-720-2598
colortronicweb@corpemail.com

Dimensions and data not binding. Copyright by Colortronic 2004.