



**Pump Curves (Consult factory for 10 HP Pump Curves)**  
**60 Hz**

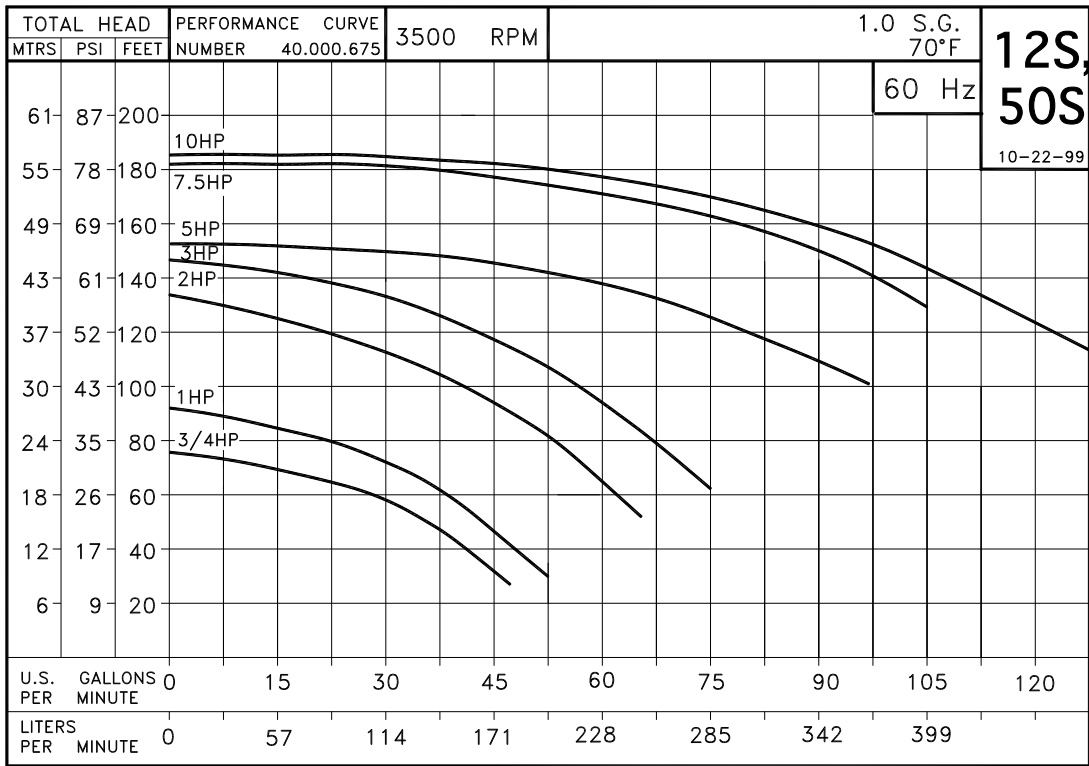

**50 Hz**

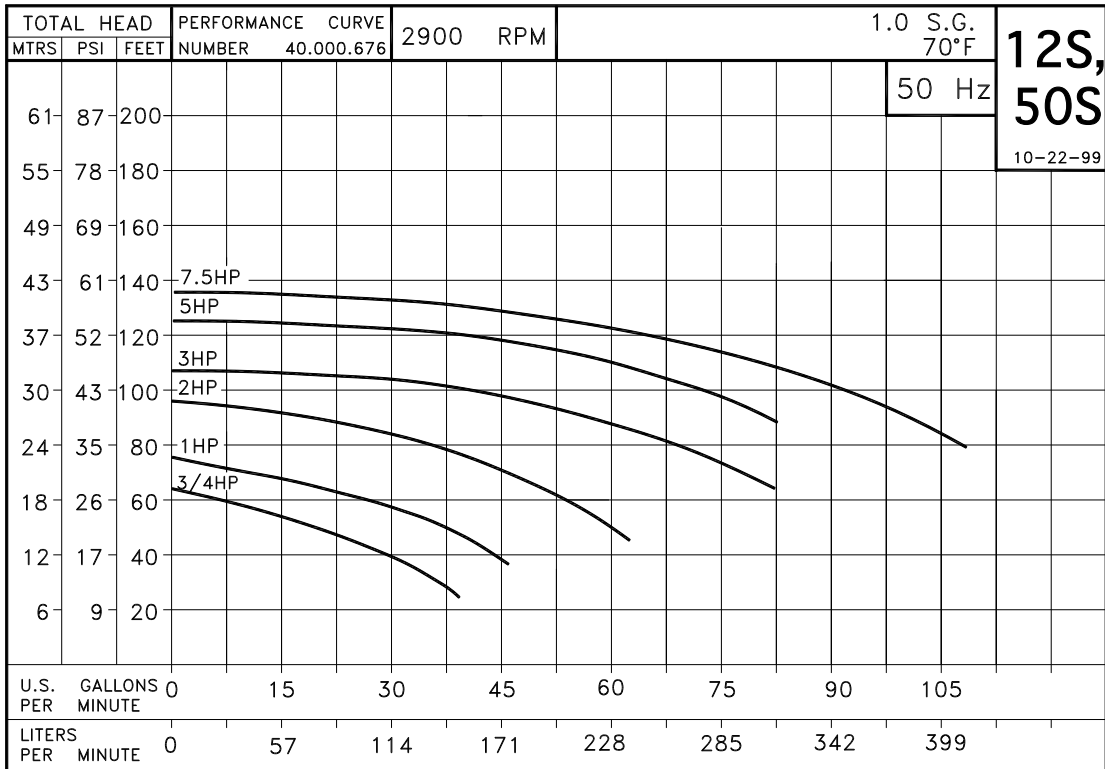

**Optional Equipment**

- Remote probe
- Digital flowmeter
- Remote control enclosure with 20 ft. cable
- Heaters:
  - 12 kw heater
  - 18 or 24 kw heaters (Compact direct injection or Upright only)
  - 36 or 48 kw heaters (Upright direct injection only, not available with all voltages)
- Manual bypass
- Brass construction
- Closed-loop heat exchanger with 1/2" solenoid
  - U-tube
  - Shell & tube (upright units only)
- Quick cool switch
- Pressure regulator/relief valve for water supply
- Auto system water purge
- Y strainer
- Hammer arrestor
- Ten-foot power cord, no plug
- Rubber feet in lieu of casters
- Cooling solenoid slow-close valve
- Modulating valve
- Stack rack with casters (compact models only)
- Side-by-side dolly (compact models only)
- Common wiring and piping for dual-zone
- TEFC motor
- 300°F operations
- General fault alarm, audible and visual
- 208/3/60, 200-400/3/50, 575/3/60 VAC
- UL, cUL-listed subpanel
- CE certification
- Ontario Hydro specifications
- Descaler and descaler fluid

[www.colortronicna.com](http://www.colortronicna.com)

**Corporate Headquarters:**

4100 Market Place  
Flint, MI 48507  
Tel. 810-720-7300  
Fax. 810-720-2598  
[colortronicweb@corpemail.com](mailto:colortronicweb@corpemail.com)